
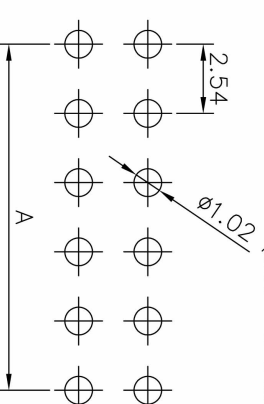
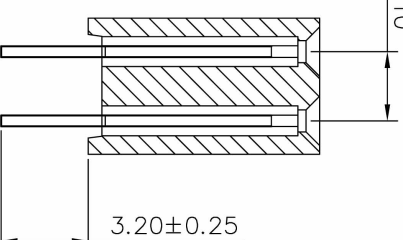
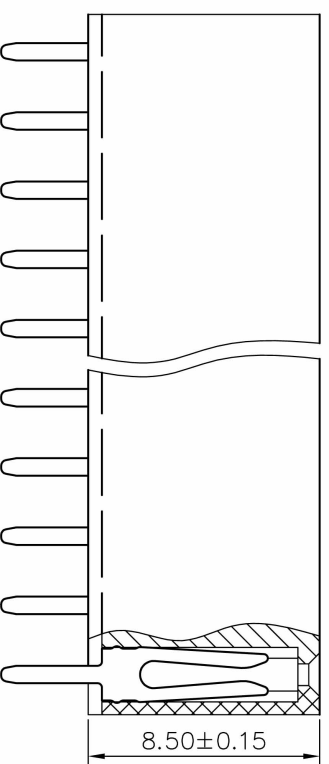


7		8	9
A	2.54 x No. of Contacts-2.54		
B	2.54 x No. of Positions		

SPECIFICATIONS

Current Rating: 3 Amps
Withstanding Voltage: AC 1000V
Insulation Resistance:1000M Ω Min
Contact Resistance: 20m Ω Max
Insulator Material: Polyester (UL94V-0)
Standard: PBT
Contact Material: Brass
Contact Plating: Au or SN over 50n" Ni
Operation Temperature:-40° to+105°
Max.Processing Temp: 180° C for 30-60 seconds
(200° C for 10 seconds)

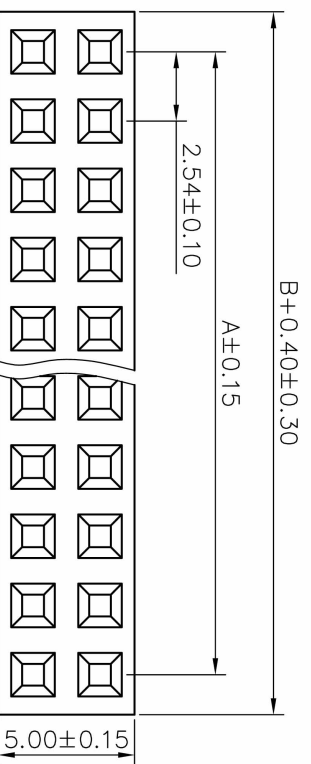

2285 2 XX GO X S Y 01

RECOMMEND P.C. BOARD LAYOUT

PCB TOLERANCE: ±0.05 (TOP VIEW)

Piastics Height	No. of Rows	No. of Pins Per Row	Contact Plating	Insulator Material Option	Connector Type
50=5.0mm	1=Single Row	2X40	SN:Tin	A BK-PBT	S=Straight
57=5.7mm	2=Dual Row	2X40	G0:Gold Flash	B BK-PA66	R=Right Angle
68=6.8mm			G2:5U"Gold	C BK-PA6T	M=SMT
71=7.1mm			G3:10U"Gold	D BK-PA46	
81=8.1mm			G4:15U"Gold	F KB-LCP	
85=8.5mm			G5:30U"Gold	S Special	
			Standard:G0		

NED ELECTRONICS LTD

TEL : 0755-8204-4241 FAX : 0755-8291-5992

UNLESS OTHERWISE SPECIFIED TOLERANCE		DRAWN NAME:	
X : ±0.3	X° : ±5°	2.54PF	2xNPin H8.5 DIP W5.0
X.X : ±0.2	X.X° : ±1°	SIZE	A4
X.XX : ±0.1	X.XX° : ±0.5°	REV	A
DATE:	25/08/10	CHECKED:	DATE:
DATE:	25/08/10	APPROVED:	DATE: